



ENDURATEX™ Synthetic EP PREMIUM SYNTHETIC HEAVY DUTY INDUSTRIAL GEAR LUBRICANTS


Petro-Canada ENDURATEX™ Synthetic EP gear oils are premium performance, extreme pressure lubricants designed for enclosed industrial gears and bearings operating under severe load conditions and in wide extremes of temperature.

ENDURATEX Synthetic EP is formulated using PAO synthetic base oils and additive technologies to deliver excellent wear properties, outstanding extreme temperature performance for extended component and fluid life.

ENDURATEX Synthetic EP enhances gear box efficiency over a wide temperature range and can reduce power consumption.

Features and Benefits


- **Outstanding anti-wear protection**
 - Extends equipment life
 - Designed to protect equipment being operated under tough high load conditions
 - Improves operating reliability over a wide range of gearbox loads

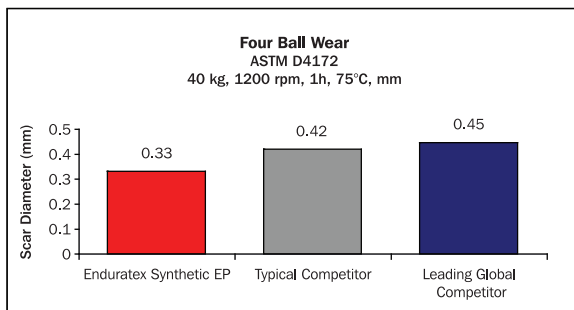

Enduratex Synthetic EP has excellent wear protection compared to its leading global competitor

- **Better film strength and extreme pressure properties than the leading global competitor synthetic**

- Extends gear and bearing life
- Reduces likelihood of seizure, scuffing or spalling of gear teeth and bearings under high load conditions

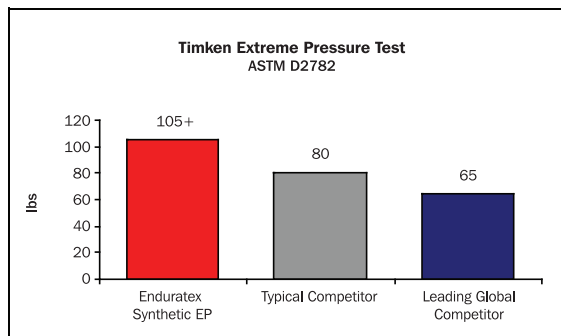

Enduratex Synthetic EP provides high Timken EP load protection for the most demanding applications.

- **Synthetic formulation reduces friction**
 - Energy efficient over a wide temperature range
- **Excellent extreme temperature performance**
 - ENDURATEX Synthetic EP Oils protect your equipment in the most extreme temperature conditions
- **Wider range of service temperatures**
 - Inherent high Viscosity Index (VI) a wide temperature range
- **Protected against water damage**
 - Provides excellent resistance to rust and copper corrosion

What is the HT difference?

Petro-Canada starts with the patented HT purity process to produce water-white, 99.9% pure base oils. The result is a range of lubricants, specialty fluids and greases that deliver maximum performance for our customers.



Applications

Petro-Canada's ENDURATEX Synthetic EP premium performance lubricants are recommended for enclosed industrial gear drives and bearings particularly where they are operated under heavy duty conditions such as heavy loading, slow speed, shock loads and in wide extremes of temperature.

The tough oil film and low coefficient of friction save energy in gearboxes. The high viscosity index of ENDURATEX Synthetic EP oils mean they retain their viscosity at high operating temperatures. This often allows the use of a lower ISO grade than with conventional gear oil resulting in even greater energy savings.

The ENDURATEX Synthetic EP line is designed to combat high temperature conditions and will run cooler while maintaining exceptional lubricant film strength. For gearboxes that operate outdoors, selected ISO grades of ENDURATEX Synthetic EP oils are capable of operating at temperatures as low as -30°C (-22°F) or below.

When converting a gearbox to ENDURATEX Synthetic EP, it is recommended it be cleaned and flushed first to gain the full benefit of the product. ENDURATEX Synthetic EP oils are compatible with mineral oils, polyalphaolefin lubricants and most seal materials except natural rubber.

The ENDURATEX Synthetic EP oils operate over the temperature range from -30°C (-22°F) to 121°C (250°F).

ENDURATEX Synthetic EP oils meet the following OEM standards:

- DIN 51517-3
- Flender Industrial Gear
- Eickhoff Gear
- Jahnel Kestermann
- US Steel 224
- AGMA 9005-E02 (EP)
- David Brown S1.53.101 Type E
- Cincinnati Machine P-74

ENDURATEX Synthetic EP oils are listed on Flender's BA7300 Recommended Lubricants List and are suitable for use in GE787/788 and GA880 units.

Typical Performance Data

| PROPERTY | TEST METHOD | ENDURATEX SYNTHETIC EP | | | |
|--|-------------|------------------------|-----------|-----------|-----------|
| | | 150 | 220 | 320 | 460 |
| AGMA Grade | | 4 EP | 5 EP | 6 EP | 7 EP |
| Density, kg/L at 15°C | | 0.8564 | 0.8598 | 0.8617 | 0.8642 |
| Colour | D1500 | 1.0 | 1.0 | 1.0 | 1.0 |
| Viscosity, cSt at 40°C | D445 | 150 | 223 | 323 | 501 |
| cSt at 100°C | | 19.46 | 26.39 | 34.9 | 49.9 |
| SUS @ 100°F | | 772 | 1152 | 1676 | 2607 |
| SUS @ 210°F | | 98 | 130 | 169 | 241 |
| Viscosity Index | D2270 | 148 | 151 | 153 | 160 |
| Pour Point, °C (°F) | D97 | -54 / -65 | -48 / 54 | -42 / 44 | -42 / 44 |
| Temperature required for 150,000 cP, °C (°F) | D2983 | -41 / -42 | -36 / -33 | -32 / -26 | -24 / -11 |
| Flash Point, °C (°F) | D92 | 232 / 450 | 235 / 455 | 237 / 459 | 237 / 459 |
| Rust, Procedure A & B, 24 h | D665 | Pass | Pass | Pass | Pass |
| Copper Corrosion, 3h @ 100°C | D130 | 1b | 1b | 1b | 1b |
| Timken OK Load, kg (lb) | D2782 | 48 / 106 | 48 / 106 | 48 / 106 | 48 / 106 |
| Four Ball EP weld, kg (lb) | D2783 | 250 / 550 | 250 / 550 | 250 / 550 | 250 / 550 |
| FZG Pass Load Stage (A/8.3/90) | DIN 51354 | 14 | 14 | 14 | 14 |

The values quoted above are typical of normal production. They do not constitute a specification.

Health and Safety

To obtain Material Safety Data Sheet (MSDS), contact one of Petro-Canada's TechData Info Lines.

TechData Info Lines

If you would like to know more about Petro-Canada's ENDURATEX Synthetic EP, or any other product in our complete line of quality lubricants, please contact us at:

Lubricants Head Office
Petro-Canada
2310 Lakeshore Road West
Mississauga, Ontario
Canada L5J 1K2



Canada - West Phone 1-800-661-1199
- East (English) Phone 1-800-268-5850
 (French) Phone 1-800-576-1686
Other Areas Phone (416) 730-2408
E-mail lubecsr@petro-canada.ca
Internet lubricants.petro-canada.ca

Petro-Canada Europe Lubricants
The Manor, Haseley Business Centre
Warwick, Warwickshire
CV35 7LS

United Kingdom
Phone +44 (0) 2476-247294
Fax +44 (0) 2476-247295

Petro-Canada America Lubricants
980 North Michigan Avenue
Suite 1400, #1431
Chicago, Illinois
USA 60611

Phone 1-888-284-4572
Fax (708) 246-8994
E-mail email@petro-canadaamerica.com